




TECHNOLOGY

UvOxy® technology: the Beghelli solution to sanitize air in civil and service sectors

The family of UvOxy® solutions has been designed for sanitizing air through a closed chamber system that is saturated with UV-C light. The UvOxy® flow cell draws in contaminated air and instantly provides sanitized air.

UV-C INTENSIVE EMISSION LAMP

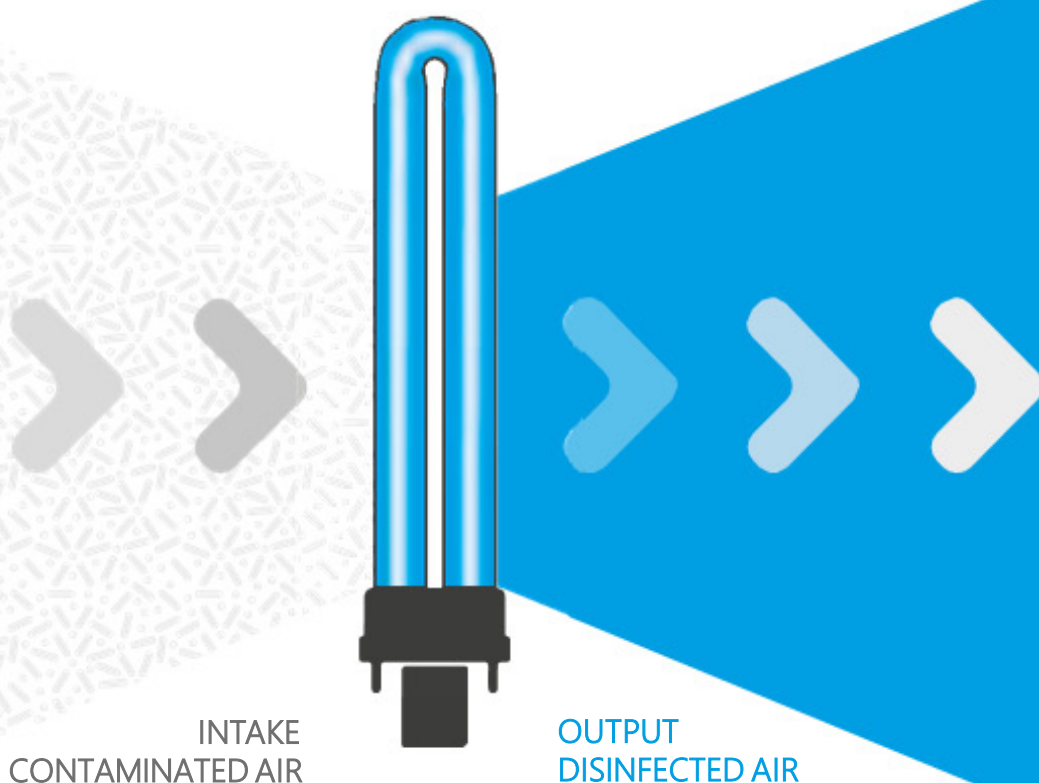

EFFECTIVE UP TO ***99.9%** AGAINST BACTERIA AND VIRUSES


UV-C radiation is generated only inside of the chamber, the intake system carries the aerosols contained in the air and puts them into contact with the sanitizing light. Microorganisms contained in the “nuclei” in the aerosols are deactivated as soon as they pass through the chamber thanks to a specific wavelength of UV-C light. Under these controlled conditions,

the higher germicidal level of UV-C radiation ensures complete sanitization of the air. The effectiveness of the UvOxy® system has been successfully tested on various types of bacteria and spores that are much more resistant to UV-C radiation, when compared with the Coronavirus.

*Tests carried out at a UNI CEI EN ISO/IEC 17025:2018 accredited laboratory have shown the effectiveness of UvOxy on a wide range of bacteria, viruses, other microorganisms



UvOxy® products feature multiple innovative technological solutions that Beghelli has protected with patent applications.

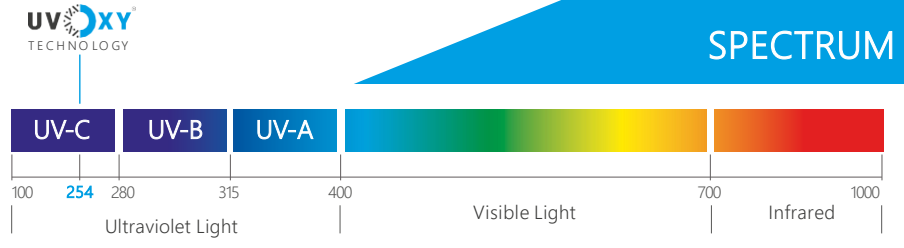

SAFETY AND EFFICIENCY OF A CONTROLLED UV-C EMISSION SYSTEM

The UV-C sanitization system employed by UvOxy® technology has been designed to prevent direct harmful UV-C emissions. In nature, at certain wavelengths (including UV-C), ultraviolet rays are harmful to humans and other life forms, but Earth's atmosphere protects us from them. By recreating rays artificially, to avoid harming people, in many UV-C devices the lamps are shielded or are used in areas that limit exposure.

Another potential danger is the generation of Ozone. Common UV-C systems can generate ultraviolet rays even at wavelengths below 254 nm, but not UvOxy® technology, which was specifically designed to avoid Ozone generation (Ozone free). The air sanitizing process based on this technology has reached such a level of safety that it can be used even if there are people in the areas being treated.


SAFETY

- Use of UV-C lamps (Ozone Free)
- Closed-chamber technology to prevent people from direct contact with UV-C rays
- Complies with the provisions enforced for electrical safety and the management of UV-C sources, including maintenance
- Tested according to the requirements of ISO15714 and compliant with IEC 60335-2-65 (Air Purifier)

EFFICIENCY

- UV-C emission with wavelength calibrated at 254nm
- Instant air sanitation via controlled closed Flow Cell the utilizes a Mirror Silver reflection system
- Automatic temperature adjustment via UV-C tube microcontroller, which maintains the system at maximum efficiency in any environmental condition

SanificaAria 200 connect

- Remote management via APP  Beghelli
- APP Bluetooth control (any smartphone)
- Built-in control





SanificaAria 30

Management by built-in control





Meets the specifications specified by the Hong Kong Government for catering business



PRODUCT TESTED ACCORDING TO STANDARD ISO 15714

Beghelli products use UV-C sources that irradiate the volume of air treated with enough energy to break down up to ***99.9%** of microorganisms. Gelt International, scientific consulting company, and Tecnal, UNI CEI EN ISO/IEC 17025:2018 accredited laboratory, carried out efficacy tests using various microorganisms such as: *Serratia marcescens*, *Bacillus subtilis*, *Cladosporium sphaerospermum*, as laid down in ISO 15714, since these are particularly resistant to UV rays. Their reduction, expressed as a percentage, is of more than ***99.9%**. Therefore, it guarantees that the product effectively breaks down a broad range of bacteria, viruses, coronaviruses and other microorganisms. The product is classified according to IEC 60335-2-65 standard for air purifiers.

Product classified according to the requirements of IEC 60335-2-65 standard

* Tests carried out at a UNI CEI EN ISO/IEC 17025:2018 accredited laboratory have shown the effectiveness of UvOxy on a wide range of bacteria, viruses, other microorganisms

laboratory tested

SanificaAria 200 connect **TACHIBANA ENGINEERING**

立花工程(香港)有限公司

sanitization



The SanificaAria 200 connect is an all-in-one solution that safely filters and sanitizes the air via a variable speed axial fan intake that draws air into the closed chamber containing the UV-C source. This chamber is where the process of sanitization is carried out. The UV-C cartridge with UvOxy® technology is installed inside the unit and has an average service life of 12* months. Cartridge replacement is easy and ensures the purification properties of the SanificaAria 200 connect over time. SanificaAria 200 connect can be controlled by means of an integrated button or a simplified bluetooth APP. The device is also available in a connected version with dedicated APP DOM-e Beghelli for remote control of parameters and activation time.

Meets the specifications specified by the Hong Kong Government for catering business

- dom-e Beghelli
- BLUETOOTH
- BUILT-IN CONTROL
- ROOM UP TO 250m²

Applications

Hospitals, hotels, schools, offices, restaurants, shops, bars, houses, etc.

Tests and certifications

Tests carried out according to ISO15714 standard on different strains of bacteria, viruses and other microorganisms.

The device also complies with the safety requirements laid down in IEC60335-2-65 standard on air purifiers

Specifications

Power supply unit 120-277V

with 2m long cable

Minimum power consumption 36 W

Maximum power consumption 60 W

UV-C Wavelength 254nm

Purification rate > 200 m³/h

UV-C power 24 W

UV-C radiation power 7,5 W

Recommended service life of the Cartridge* 12 months

* Service life calculated for on average daily usage of 24h

EXEMPLIFICATION OF AIR SANITIZING

Room size		
Surface m ²	Cubic m ³	Sanitizing time h
42	100	0,5
85	200	1
125	300	1,5
170	400	2
250	600	3

Dimensions mm			Sanitizing rate
A	B	H	
125	455	296	200 m ³ /h


FLOOR-STAND INSTALLATION



WALL-MOUNT INSTALLATION



Item	Radiation power W	Description	Purification rate	Web connection	Absorption		Weight Kg	Pack
					MIN	MAX		
26702	7,5	SANIFICAARIA 200 CONNECT	200 m ³ /h	Via APP	36W	60W	10	2

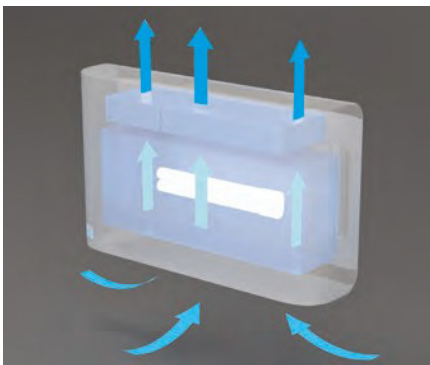

INTELLIGENT AIR SANITIZING


UvOxy® technology, which draws contaminated air in and provides sanitized air, is standard on all Beghelli SanificaAria products. The SanificaAria 200 connect features a UV-C chamber that has been sized to purify a high volume of air. Ideally suited for medium to large rooms, the SanificaAria 200 features 3-speed variable axial fans; making it possible to treat up to 200 m³ of air per hour. The integrated automatic temperature control maintains the unit at maximum efficiency at all times.

LOCAL AND REMOTE CONTROL

SanificaAria 200 connect can be managed locally or by means of a simplified APP that turns your smartphone into a remote control. In the connect version, by using the APP dom-e Beghelli, the user can control all the functions of the air purification system remotely.



APP for local control (via bluetooth)

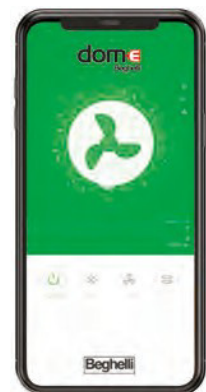

APP for remote control

SUPPLIED



POWER CORD
length 2 m

SPARE PARTS

replace every 12* months of operation



SANITIZING CARTRIDGE uvOxy 200
With built-in protection filter and UV-C flow cell

Item 26721

SanificaAria 30

sanitization



Meets the specifications specified by the Hong Kong Government for catering business

BUILT-IN CONTROL

ROOM UP TO 50m²

The SanificaAria 30 is a compact solution that safely filters and sanitizes the air via a variable speed axial fan intake that draws air into the closed chamber containing the UV-C source. This chamber is where the process of sanitization is carried out. The UV-C cartridge with UvOxy technology is installed inside the unit and has an average service life of 12* months. Cartridge replacement is easy and ensures the purification properties of the SanificaAria 30 over time. Flexible mounting options including wall, slab or floor stand allow for versatile installation. Control of the unit is by an integrated button.

Applications

Hospitals, hotels, schools, offices, restaurants, shops, bars, houses, etc.

Tests and certifications

Tests carried out according to ISO15714 standard on different strains of bacteria, viruses and other microorganisms.

The device also complies with the safety requirements laid down in IEC60335-2-65 standard on air purifiers

Specifications

Power supply unit 120-277V with

2m long cable

Consumption 25 W

UV-C Wavelength 254nm

Purification rate 30 m³/h

UV-C power 18 W

UV-C radiation power 5,5 W

Recommended service life

of the Cartridge* 12 months

* Service life calculated for on average daily usage of 24h

EXEMPLIFICATION OF AIR SANITIZING

Room size		
Surface m ²	Cubic m ³	Sanitizing time h
6	15	0,5
13	30	1
25	60	2
38	90	3
50	120	4

Dimensions mm						Sanitizing rate
A	B	H	A1	B1	H1	
100	100	475	152	152	584	30 m ³ /h

WALL AND CEILING MOUNT



FLOOR-STAND



LAY ON MOUNT



SUSPENSION MOUNT




Item	Radiation power W	Description	Purification rate	Web connection	Absorption AC	Weight Kg	Pack
26700	5,5	SANIFICAARIA 30	30 m ³ /h	-	25W	3,5	4



INTELLIGENT AIR SANITIZING


UvOxy® technology, which draws contaminated air in and provides sanitized air, is standard on all Borghelli SanificaAria products. The SanificaAria 30 features a UV-C chamber that has been sized to purify a high volume of air. Ideally suited for medium to large rooms, the SanificaAria 200 features 3-speed variable axial fans; making it possible to treat up to 30m³ of air per hour.

SUPPLIED



SPARE PARTS

replace every 12* months of operation



Uv Oxy[®] applications

TACHIBANA ENGINEERING
立花工程(香港)有限公司

recommended applications



立花工程(香港)有限公司 **TACHIBANA ENGINEERING**

香港新界葵涌青山道 403 號 匯城集團大廈 6 樓 C 室

立花工程(香港)有限公司

電話 : 852-2403-4898 傳真 : 852-2403-4000 電郵 : info@te.com.hk

www.te.com.hk